



T-H2

THE NEW

Quality | Service | Reliability

PVC Venting
0" Clearance
Easy-Link 4 Units
Super High Efficiency



2nd Generation
High Efficiency Tankless



T-H2-DV

T-H2-OS



THE NEW

T-H2-DV/OS



2nd Generation High Efficiency Tankless



PVC Venting | 0" Clearance (Venting to Combustibles)
Easy-Link 4 Units | Super High Efficiency




General Specifications:

Market Category: Residential / Light Commercial	Gas Input: [BTU/hr] 13,000 -199,000	PVC Venting Adaptor: Standard - Included in the box
Installation: DV (Indoor only) / OS (Outdoor only)	Maximum Flow Rate: [GPM] 9.0	High Altitude: [ft] Dipswitch Settings Available
Dimensions (H x W x D)": 25.6 x 18.5 x 12.4	Energy Factor: 0.90	Warranty (years) Call Takagi for detailed information.
Weight: OS = 70lbs / DV = 73lbs	Easy-Link / Multi-Unit: Easy-Link up to 4	
Connection Size: Water = 3/4" / Gas = 3/4" Exhaust Flue = 3" or 4" Intake Air = 3" or 4"	Primary HX Material: "Heat Resistant Alloy" HRS35 Copper	Residential: 10 (Heat Exchanger) / 5 (Parts) / <u>1</u> (Labor)
	Secondary HX Material: "High Corrosion Resistant Stainless Steel" #316L	Commercial / Recirculation: 5 (Heat Exchanger) / 5 (Parts) / <u>1</u> (Labor)



Features:

- PVC venting can be used in all applications
- Up to 16 different temperature settings without a remote
- Built-in temperature and error code display
- CSA certified software
- AFR (Air Fuel Ratio Sensor)

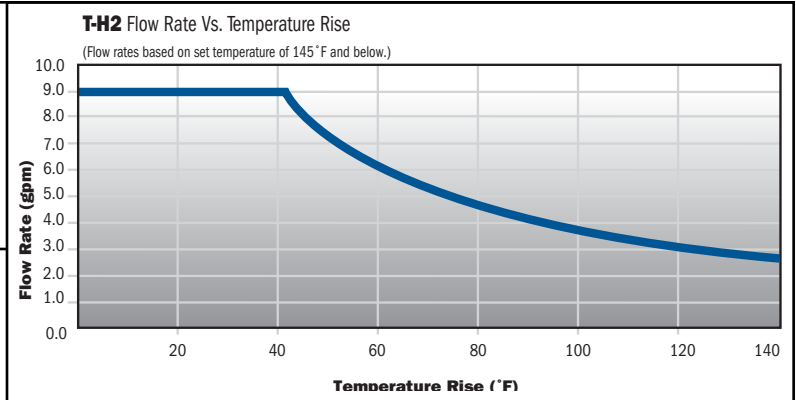

Optional Accessories:

- Pipe cover (TH-PC02)
- Remote (TM-RE30)
- Neutralizer (TH-NT01)
- Isolation Valves (TK-IV01)
- PVC Intake Adaptor (TH-PA02)
-Use for a clean installation.
- Concentric Termination (TH-CVPVC33)
-Use for a clean installation.
-Only one wall penetration required.



T-H2 COMPARISON			
FEATURES	Navien	Noritz	TAKAGI
Robust temperature safety controls to prevent PVC meltdowns.	NO Only one HL switch	NO Only one HL switch	YES! One HL switch with additional thermistor to monitor exhaust temperatures.
Uses HRS copper for primary HX and SS#316L for secondary HX.	NO	NO	YES!
3 digit display window that shows temperature and error codes for easy trouble shooting.	NO	NO	YES!
OS Specific Model Available	NO	NO (Requires vent cap)	YES!
Included PVC adaptor	NO	NO	YES!